

# Finger Ring Sizer and International Ring Size Conversion Chart

Please note that these are approximate sizes depending on how accurate you are.


The most accurate way to measure your ring size is to go to your local jeweller and have your finger measured and sized.

If that is not possible please find below a Ring Sizer and International Ring Size Conversion Chart that you might find handy.

In order to accurately print the ring sizer below, be sure that your printer is set to a full 100%. Make sure that you have not reduced the print size in your printer "page setup" area. You can make sure that the Ring Sizer printed correctly by measuring it with a ruler; it should measure 3 1/2 inches long from A to B.

Once you have accurately printed this page, please follow the directions to find your ring size.

1. Cut out the ring sizer.
2. Cut a slit for Slot "A"
3. With the numbers facing out, wrap the sizer around the finger where the ring will be worn.
4. Pull the pointed end Tab "B" through Slot "A" until the sizer is snug, making sure to allow size for the knuckle. Make sure to pull it snug, the ring will not be quite as snug as the sizer.
5. The number aligned with Slot "A" is your ring size.
6. If the measure lands between two numbers your size is a half size. Eg. between 5 and 6 ring size is 5 1/2. When half sizes are not available go to the next larger size.

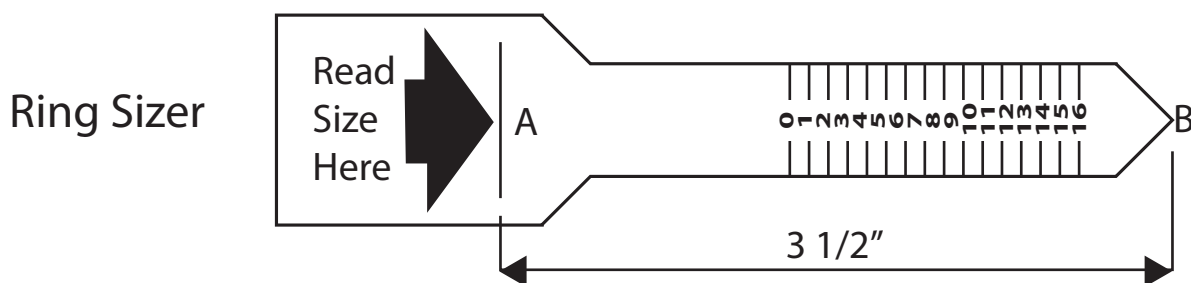

## International Ring Size Conversion Chart

U.S. & Canadian Standard	Inside		Equivalents			
	Diameter mm / inches	Circumference mm / inches	British	French	German	Japanese
1 1/2	12.78 / .503	40.2 / 1.580	C	40 1/2	12 3/4	-
2	13.21 / .520	41.5 / 1.634	D	41 1/2	13 1/4	2
2 1/2	13.61 / .536	42.7 / 1.684	E	42 3/4	13 3/4	3
3	14.05 / .553	44.0 / 1.739	F	44	14	4
3 1/2	14.45 / .569	45.2 / 1.788	G	45 1/4	14 1/2	-
4	14.86 / .585	46.5 / 1.836	H 1/2	46 1/2	15	7
4 1/2	15.27 / .601	47.8 / 1.888	I 1/2	47 3/4	15 1/4	8
5	15.70 / .618	49.0 / 1.941	J 1/2	49	15 3/4	9
5 1/2	16.10 / .634	50.2 / 1.992	L	50 1/4	16	-
6	16.51 / .650	51.5 / 2.042	M	51 1/2	16 1/2	12
6 1/2	16.92 / .666	52.8 / 2.092	N	52 3/4	17	13
7	17.35 / .683	54.0 / 2.146	N 1/2	54	17 1/4	14
7 1/2	17.63 / .699	55.3 / 2.196	O 1/2	55 1/2	17 1/2	15
8	18.19 / .716	56.6 / 2.249	P 1/2	56 3/4	18	16
8 1/2	18.59 / .732	57.8 / 2.300	Q 1/2	58	18 1/2	17
9	18.99 / .748	59.1 / 2.350	R 1/2	59 1/4	19	18
9 1/2	19.41 / .764	60.3 / 2.400	S 1/2	60 1/2	19 1/2	19
10	19.84 / .781	61.6 / 2.463	T 1/2	61 3/4	20	20
10 1/2	20.24 / .797	62.8 / 2.504	U 1/2	62 3/4	20 1/4	22
11	20.68 / .814	64.1 / 2.567	V 1/2	64 1/2	20 3/4	23
11 1/2	21.01 / .830	66.0 / 2.608	W 1/2	66	21	24
12	21.41 / .846	67.3 / 2.658	Y	67 1/4	21 1/2	25